

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/NO05/000061

International filing date: 18 February 2005 (18.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: NO
Number: 20040756
Filing date: 20 February 2004 (20.02.2004)

Date of receipt at the International Bureau: 14 March 2005 (14.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



KONGERIKET NORGE
The Kingdom of Norway

Bekreftelse på patentsøknad nr
Certification of patent application no



20040756

► Det bekreftes herved at vedheftede dokument er nøyaktig utskrift/kopi av ovennevnte søknad, som opprinnelig inngitt 2004.02.20

► *It is hereby certified that the annexed document is a true copy of the above-mentioned application, as originally filed on 2004.02.20*

2005.02.24

Line Reum

Line Reum
Saksbehandler



2004 -02- 20

www.patentstyret.no



Søknad om patent

Ferdig utfylt skjema sendes til adressen nedenfor. Vennligst ikke heft sammen sidene.
Vi ber om at blankettene utfylles *maskinelt* eller ved bruk av *blokkbokstaver*. Skjema for
utfylling på datamaskin kan lastes ned fra **www.patentstyret.no**.

Søker Den som søker om patent blir også innehaver av en eventuell rettighet. Må fylles ut!

Foretakets navn (fornavn hvis søker er person):
Renewable Energy Corporation

Etternavn (hvis søker er person):

☒ Kryss av hvis søker tidligere har vært kunde hos Patentstyret.

Oppgi gjerne kundenummer:

Adresse:
Veritasveien 14

P.O. Box 280

Postnummer:
1323

Poststed:
HØVIK

Land:

☐ Kryss av hvis flere søkere er angitt i
medfølgende skjema eller på eget ark.

☐ Kryss av hvis søker(ne) utfører
20 årsverk eller mindre (se veiledning).

Kontaktinfo Hvem skal Patentstyret henvende seg til? Oppgi telefonnummer og eventuell referanse.

Fornavn til kontaktperson for fullmektig eller søker:
Lilia Vázquez

Etternavn:
Holm

Telefon: 23 32 77 00

Referanse (maks. 30 tegn):
116080 LVH/EHF

☒ Evt. adresse til kontaktperson:

Postnummer:

Poststed:

Land:

Fullmektig Hvis du ikke har oppnevnt en fullmektig, kan du gå til neste punkt.

Foretakets navn (fornavn hvis fullmektig er person):
ONSAGERS AS

Etternavn (hvis fullmektig er person):

☒ Kryss av hvis fullmektig tidligere har vært kunde hos Patentstyret.

Oppgi gjerne kundenummer: 1075

Adresse:
Postboks 6963 St. Olavs plass

Postnummer:
0130

Poststed:
OSLO

Land:

Oppfinder Oppfinneren skal alltid oppgis selv om oppfinner og søker er samme person.

Oppfinnerens fornavn:
Erik

Etternavn:
Sauar

☒ Kryss av hvis oppfinner tidligere har vært kunde hos Patentstyret.

Oppgi gjerne kundenummer:

Adresse:

Postnummer:

Poststed:

Land:

☒ Kryss av hvis flere oppfinnere er angitt i medfølgende skjema eller på eget ark.

ADRESSE
► Postboks 8160 Dep.
Københavnsgaten 10
0033 Oslo

TELEFON
► 22 38 73 00
TELEFAKS
► 22 38 73 01

BANKGIRO
► 8276.01.00192
ORGANISASJONSNR.
► 971526157 MVA



PATENTSTYRET®
Styret for det industrielle rettsvern



... søknad om patent

Tittel Gi en kort benevnelse eller tittel for oppfinnelsen (ikke over 256 tegn, inkludert mellomrom).

Tittel:
Method and system for establishing correspondence and traceability between wafers and solar cells

PCT Fylls bare ut hvis denne søknaden er en videreføring av en tidligere innlevert internasjonal søknad (PCT).

Inngivelsesdato (åååå.mm.dd):

Søknadsnummer:

PCT

/

PCT-søknadens dato og nummer:

Prioritetskrav Hvis du ikke har søkt om denne oppfinnelsen tidligere (i et annet land eller i Norge) kan du gå videre til neste punkt.

Prioritet kreves på grunnlag av tidligere innlevert søknad i Norge eller utlandet:

Inngivelsesdato (åååå.mm.dd):

Landkode:

Søknadsnummer:

Opplysninger om tidligere søknad. Ved flere krav skal tidligste prioritet angis her:

☐ Flere prioritetskrav er angitt i medfølgende skjema, eller på eget ark.

Biologisk materiale Fylls bare ut hvis oppfinnelsen omfatter biologisk materiale.

Søknaden omfatter biologisk materiale. Deponeringssted og nummer må oppgis:

Deponeringssted og nummer (benytt gjerne eget ark)

☐ Prøve av materiale skal bare utleveres til en særlig sakkyndig.

Avdelt/utskilt Hvis du ikke har søkt om patent i Norge tidligere, kan du gå videre til neste punkt.

Søknaden er avdelt eller utskilt fra tidligere levert søknad i Norge:

Dato (åååå.mm.dd):

Søknadsnummer:

☐ Avdelt søknad

Informasjon om opprinnelig

☐ Utskilt søknad

søknad/innsendt tilleggs materiale

Annet

☐ Søknaden er også levert per telefaks. Oppgi dato (åååå.mm.dd):

☐ Jeg har fått utført forundersøkelse. Oppgi nr (årstall - nummer - bokstav):

Vedlegg Angi hvilken dokumentasjon av oppfinnelsen du legger ved, samt andre vedlegg.

☒ Tegninger

Oppgi antall tegninger:

3

☒ Beskrivelse av oppfinnelsen

☒ Patentkrav

☐ Fullmaktsdokument(er)

☒ Sammendrag på norsk

☐ Overdragelsesdokument(er)

☐ Dokumentasjon av eventuelle prioritetskrav (prioritetsbevis)

☐ Erklæring om retten til oppfinnelsen

☐ Oversettelse av internasjonal søknad (kun hvis PCT-felt over er fylt ut)

☒ Annet: Vi ber om granskning pga de engelskspråklige dok.

Dato/underskrift Sjekk at du har fylt ut punktene under «Søker», «Oppfinner» og «Vedlegg». Signer søknaden.

Sted og dato (blokkbokstaver):

Oslo, 20. februar 2004

Navn i blokkbokstaver:

ONSAGERS AS

Signatur:

NB! Søknadsavgiften vil bli fakturert for alle søknader (dvs. at søknadsavgiften ikke skal følge søknaden).
Betalingsfrist er ca. 1 måned, se faktura.



PATENTSTYRET®
Styret for det industrielle rettsvern

SØKNAD s. 2 av 2

Vedleggsskjema:

www.patentstyret.no



Flere oppfinnere

Dette skjemaet benyttes som vedlegg til patentsøknaden for å oppgi flere oppfinnere. **NB! Gi hver oppfinner et nummer.** Personen oppgitt på søknadsskjemaet vil alltid bli registrert som nr. 01. Første angivelse på dette skjema vil være oppfinner 02. Skjema for utfylling på datamaskin kan lastes ned fra **www.patentstyret.no**.

► **Referanse** Gjentag referansen fra «kontaktinfo», eventuelt søkerens navn, som angitt på søknadsskjemaets første side. (Må fylles ut!)

Referanse:

116080 LVH/EHF

▼ **Oppfinner nr:**

2

Fornavn og mellomnavn:
Thor-Christian

Etternavn:

Tuv

☐ Oppfinner har tidligere vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

Adresse:

Postnummer:

Poststed:

Land:

▼ **Oppfinner nr:**

Fornavn og mellomnavn:

Etternavn:

☐ Oppfinner har tidligere vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

Adresse:

Postnummer:

Poststed:

Land:

▼ **Oppfinner nr:**

Fornavn og mellomnavn:

Etternavn:

☐ Oppfinner har tidligere vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

Adresse:

Postnummer:

Poststed:

Land:

▼ **Oppfinner nr:**

Fornavn og mellomnavn:

Etternavn:

☐ Oppfinner har tidligere vært kunde hos Patentstyret.

Oppgi gjerne kundennummer:

Adresse:

Postnummer:

Poststed:

Land:

NB! Ved behov for mer plass benyttes flere skjema eller eget ark.

FLERE OPPFINNERE



PATENTSTYRET®
Styret for det industrielle rettsvern

Applicant: Renewable Energy Corporation
Veritasveien 14
P.O.Box 280
N-1323 HØVIK

Agent: ONSAGERS AS
Postboks 6963 St. Olavs plass
N-0130 OSLO

Inventor: Erik Sauar
Thor-Christian Tuv

Title: Method and system for establishing correspondence and
traceability between wafers and solar cells

The present invention is related to production of solar cells, and more precisely to a method and a system for establishing correspondence between wafers and solar cells produced from said wafers, to provide solar cell traceability.

5 A solar cell panel comprises a matrix of solar cells, which convert sun light into electricity. Each solar cell is produced by treating a silicon wafer. Silicon wafers are cut out of a large silicon body called ingot.

The ingot is manufactured in a furnace, and good care is taken to control among other things the ingot's temperature during manufacturing, since it plays a very important role in defining the quality of the ingot.

10 A large ingot has normally an uneven quality. This uneven quality is reflected in the wafers cut from the ingot and in the cells, and it will lie as a bottom line defining the wafer and cell characteristics.

15 Cell quality can be measured swiftly and reliably. Usually cell quality is determined by means of an inspection, where the cell's surface, conductivity, efficiency and shunt resistance are measured. Ingot and wafer quality can not be measured as precisely as cell quality, and a full characterization of wafer and ingot quality always includes cell processing of the materials. Detailed wafer and ingot quality measurements are very costly and require several weeks of testing, which makes them unsuitable for a production process.

20 The invention has thus as an object to provide a method for establishing correspondence between a cell and a wafer, that is, identifying which cell is produced from which wafer.

25 By means of the invention cell quality will easily be correlated to wafer and ingot quality and the furnace and other production parameters can be modified to increase the electrical quality and mechanical strength of both wafers and cells.

There are several methods for tracing a cell back to a wafer:

- 1) An identification of the wafer is written on the wafer's surface by means of a marker (US 6,482,661). This method has the disadvantage that it leads to reduction in the wafer's surface quality. It is besides not suitable for mass
30 production.
- 2) A small cut is performed on the wafer. This method leads to increased breakage ratio.

- 3) Tracking by means of advanced data systems which "follow" a wafer during all the process. This alternative is highly expensive as it requires adapting the tracking system to equipment produced by different entities.

5 Alternatives 1) and 2) are presently only used in the field of research. Alternative 3) is possibly used for very high amounts of cells, where the size of the batches justifies a high investment in tracking system.

The invention has as an aim to provide a method and a system which do not modify the wafer's surface, and at the same time do not require adapting the tracking system to different pieces of equipment.

- 10 This object is achieved by means of a method and a system for establishing correspondence between wafers and solar cells produced from said wafers. Said method comprises, for each wafer and each solar cell,
- a) providing an image of the wafer,
 - b) providing an image of the cell,
 - 15 c) comparing the wafer image to the cell image,
 - d) upon match between a cell image and a wafer image, assigning the current cell to the current wafer.

20 The invention is based on the concept that the crystallographic structure is unique for each wafer, and that this structure is visible both in the wafer and in the manufactured cell, so that image information is sufficient to establish a correspondence between a cell and a wafer.

Once a correspondence is established, it can e.g. be used to assign wafer data to each cell. According to one aspect of the method disclosed, it comprises linking wafer identification data to the corresponding cell.

- 25 According to another aspect, the method permits determining quality for different sections of an ingot, where each section corresponds to one wafer. In this embodiment, the method comprises: assigning inspection data to each cell, assigning a wafer position (in the ingot) to each wafer, and upon match between a cell image and a wafer image, assigning cell inspection data to each wafer position
- 30 in the ingot.

35 Ingot quality data for each section (wafer) which are derived from this process, will permit analysis of the ingot's production process. A feedback system can then be implemented for adjusting process variables to obtain even good quality in the ingot. According to this, one aspect of the invention comprises adjusting ingot and/or wafer production parameters based on cell inspection data. The method according to the invention requires provision of cell and wafer images. These images can be provided by means of at least one CCD camera, s CMOS camera, a

digital camera, an IR depicting system or any other depicting system. The suitable system has to have a sufficient definition/resolution to provide an almost unique image for each wafer/cell.

5 According to another aspect, the method permits determining quality (electrical and mechanical) for different production equipment in the wafer and cell production processes. In this embodiment, the method comprises: assigning inspection data to each cell, assigning complete manufacturing history to each wafer, and upon match between a cell image and a wafer image, assigning cell inspection data to each wafer manufacturing history.

10 Image data will be achieved by means of "fingerprint matching" software, that is image recognition software available in the market.

15 It is possible to implement one embodiment of the method where correspondence is established by means of image matching together with other methods, for example data tracking of the wafers. In this case, as the methods will complement one another, it will be possible to achieve satisfactory results without requiring high definition in the imaging system nor a complete data tracking.

20 By means of the invention it is also possible to create a database comprising cell/wafer images which are stored independently or linked to one another. Such a database will be highly useful for e.g. computing statistics. According to this, in one aspect, the method comprises storing the wafer image and the cell image in a memory before and/or after assigning the current cell to the current wafer.

The invention comprises also a method for controlling production parameters in a solar cell and/or wafer production process, comprising:
a) providing an image, the ingot position data and/or manufacturing history for each
25 wafer,
b) providing an image and inspection data for the cell,
c) comparing the wafer image to the cell image,
d) upon match between a cell image and a wafer image, assigning the current cell's
inspection data to the current wafer position in the ingot and to the other
30 manufacturing history of the wafer.

This method provides leads to ingot data related to each wafer position in the ingot.

In one aspect, the latter method comprises regulating ingot and/or wafer production based on cell inspection data assigned to wafer manufacturing history and identity, e.g. wafer position in ingot and other elements of the wafer manufacturing history.
35 Of course it will be possible to use these parameters also for controlling cell production.

The invention comprises also a system for establishing correspondence between wafers and solar cells produced from said wafers, comprising:

- at least one imaging device for providing images of the wafers and the cells,
- a processing unit for comparing a wafer image to a cell image, and upon match
5 between a cell image and a wafer image, assigning the current cell to the current wafer, and
- a memory unit.

In one aspect of the invention the processing unit is adapted to assign wafer identification data to the corresponding cell.

- 10 In another aspect the processing unit is connected to a cell inspection unit providing cell inspection data, and is adapted to
- assign inspection data to each cell,
 - assign a wafer position to each wafer, and
 - upon match between a cell image and a wafer image, assign cell inspection data to
15 each wafer position. It is also possible for the processing unit to receive cell inspection data via a manual input device (operator input) or other types of input devices (data file).

- 20 In a further aspect of the invention, the processing unit is connected to an input device for ingot and/or wafer production control. In a further aspect, it is adapted to adjust ingot and/or wafer production parameters based on cell inspection data.

In a further aspect of the invention, the system comprises two imaging devices.

Said imaging device(s) can be alike or different, and can be implemented, both in the case where a single device is used and where two devices are used by means of a CCD camera, a digital camera or an IR depicting system.

- 25 In one embodiment of the invention, the memory unit is adapted to store the wafer image and the cell image in a memory before and/or after a cell is assigned to a wafer.

- The invention comprises also a system for controlling production parameters in a solar cell production process,
30 comprising:

- a) at least one imaging device for providing images of the wafers and the cells,
- b) a unit for providing wafer position data and/or manufacturing history,
- c) a cell inspection unit for providing inspection data for each cell,
- d) a processing unit for comparing each wafer image to the a cell image,
35 and upon a match between a cell image and a wafer image, assigning the current cell's inspection data to the current wafer and/or wafer position,
- e) a memory unit.

According to one aspect of this system, the processing unit is adapted to regulate ingot and/or wafer production based on cell inspection data assigned to wafers and/or wafer positions.

5 The invention will now be described by means of an example illustrated in the drawings, where:

figure 1 is a block diagram illustrating wafer manufacture,
figure 2 is a block diagram illustrating cell manufacturing,
figure 3 is a block diagram illustrating one embodiment of the invention.

10 Figure 1 is a block diagram illustrating wafer manufacture. The point of departure (step 101) is a silicon ingot 1. This ingot is first sectioned into smaller ingots 2 (step 102), and these are sawed (step 103) by means of wire saws into wafers 3 (step 104). As one can see, the grain structure of the wafer is not modified during this production process.

15 Figure 2 shows the cell manufacturing process, and imaging devices 4 and 5 for providing images of the wafer and the cells. The process starts with wafers 3 which were cut out from ingot 1 in figure 1. In step 201, the wafers are subject to etching and texturisation, in step 202 a phosphorus doping is performed, in step 203 the edges of the wafers are etched, in step 204 the oxide layer on the wafer is removed.
20 In step 205 an anti reflective coating is applied on the surface. After these steps, the wafer enters a screen printing line. In this screen printing line, the wafer is processed by means of a first printer (step 206), a first dryer (step 207), a second printer (step 208) and a second dryer (step 209). An FO unit is situated after step 209. After this follows a third printer (step 210) and a sintering process in a furnace
25 (step 211) followed by a cell sorting procedure (step 212). When the cells are finished, a quality control is performed (step 213).

As shown in the figure, a first imaging device 4, in this case a camera, is adapted to provide an image of each wafer before the cell manufacturing process starts. During the sorting step, an image of each cell is provided by means of a second imaging
30 device 5.

Figure 3 shows an embodiment of the system according to the invention. Said system comprises:

- one or several imaging devices 4, 5 for providing wafer and cell images,
- a unit 6 for providing wafer position data, the function of this unit being to
35 provide data regarding original position of each wafer in an ingot,
- a cell inspection unit 7 for providing inspection data for each cell, this cell inspection unit performs the quality control operation in step 213 in figure 2,
- a processing unit for comparing each wafer image to a cell image to identify the original wafer for each cell and for assigning cell inspection data to the


corresponding wafer and/or wafer position,
- a memory unit (9) for storage of processing instructions and data.

5 In one embodiment of the system, the processing unit is adapted to regulate ingot and/or wafer production (IPP, WPP) based on cell inspection data assigned to wafers and/or wafer positions. This is shown in figure 3, where processing unit 8 can control the ingot production process directly, or via a production process input device 9 can send commands to processing unit(s) which control the ingot and wafer production process. Although it is not shown in the figure, it is also possible to control cell production process (CPP) by means of processing unit 8.

10 The system can also comprise a user interface 10 for input of commands and data regarding ingot/wafer/cell, and a display for communication with a user.

Figure 3 shows also in which steps of the process data regarding ingot/wafer/cell are collected, where this data comprises wafer and cell image, wafer position information, cell inspection data, etc.

15 As one can see, the invention provides reliable and swift feedback regarding process quality and permits thus adjustment of process parameters to achieve a better result.




CLAIMS

1. Method for establishing correspondence between wafers and solar cells produced from said wafers, comprising, for each wafer and each solar cell,
 - a) providing an image of the wafer,
 - 5 b) providing an image of the cell,
 - c) comparing the wafer image to the cell image,
 - d) upon match between a cell image and a wafer image, assigning the current cell to the current wafer.
- 10 2. Method according to any of the preceding claims, comprising assigning wafer identification data to the corresponding cell.
3. Method according to any of the preceding claims, comprising:
 - assigning inspection data to each cell,
 - assigning a wafer position to each wafer, and
 - upon match between a cell image and a wafer image, assigning cell inspection data
 - 15 to said wafer position in the ingot.
4. Method according to claim 3, comprising:
 - adjusting ingot and/or wafer production parameters based on cell inspection data.
5. Method according to claim 1,
 - wherein the images are provided by means of at least one CCD camera, a CMOS
 - 20 camera, a digital camera or an IR depicting system.
6. Method according to any of the preceding claims, comprising storing the wafer image and the cell image in a memory before and/or after assigning the current cell to the current wafer.
7. Method for controlling production parameters in a solar cell production process, comprising:
 - 25 a) providing an image, the ingot position data and/or manufacturing history for each wafer,
 - b) providing an image and inspection data for each cell,
 - c) comparing the wafer image to the cell image,
 - 30 d) upon match between a cell image and a wafer image, assigning the current cell's inspection data to the current wafer position in the ingot and/or the other manufacturing history of the wafer.
8. Method according to claim 7,
 - comprising regulating ingot and/or wafer production based on cell inspection data
 - 35 assigned to wafer manufacturing history and identity, e.g. wafer position in ingot and other elements of the wafer manufacturing history.

9. System for establishing correspondence between wafers and solar cells produced from said wafers, comprising:
- at least one imaging device for providing images of the wafers and the cells,
 - a processing unit for comparing a wafer image to a cell image, and upon match
- 5 between a cell image and a wafer image, assigning the current cell to the current wafer,
- a memory unit.
10. System according to claim 9, where the processing unit is adapted to assign wafer identification data to the corresponding cell.
- 10 11. System according to any of the preceding claims, where the processing unit is connected to a cell inspection unit providing cell inspection data, and is adapted to:
- assign inspection data to each cell,
 - assign a wafer position to each wafer, and
- 15 - upon match between a cell image and a wafer image, assign cell inspection data to each wafer position.
12. System according to claim 11, where the processing unit is connected to an input device for ingot and/or wafer production control, and/or is adapted to
- adjust ingot and/or wafer production parameters based on cell inspection data.
- 20 13. System according to any of the preceding claims, comprising two imaging devices.
14. System according to any of the preceding claims, wherein the imaging device(s) is a CCD camera, a digital camera or an IR depicting system.
15. System according to any of the preceding claims, where the memory unit is
- 25 adapted to store the wafer image and the cell image in a memory before and/or after a cell is assigned to a wafer.
16. System for controlling production parameters in a solar cell production process, comprising:
- a) at least one imaging device for providing images of the wafers and the cells,
 - 30 b) a unit for providing wafer position data and/or manufacturing history,
 - c) a cell inspection unit for providing inspection data for each cell,
 - d) a processing unit for comparing each wafer image to the a cell image, and upon a match between a cell image and a wafer image, assigning the current cell's inspection data to the current wafer and/or wafer position,
 - 35 e) a memory unit.

17. System according to claim 16, where the processing unit is adapted to regulate ingot and/or wafer production based on cell inspection data assigned to wafers and/or wafer positions.



ABSTRACT

The invention regards a method and a system for establishing correspondence between wafers and solar cells produced from said wafers. The method comprises
5 for each wafer and each solar cell, providing an image of the wafer, providing an image of the cell, comparing the wafer image to the cell image, upon match between a cell image and a wafer image, assigning the current cell to the current wafer. The
10 system comprises at least one imaging device for providing images of the wafers and the cells, a processing unit for comparing a wafer image to a cell image, and upon match between a cell image and a wafer image, assigning the current cell to the current
15 wafer, and a memory unit.



Flow diagram – wafer manufacturing

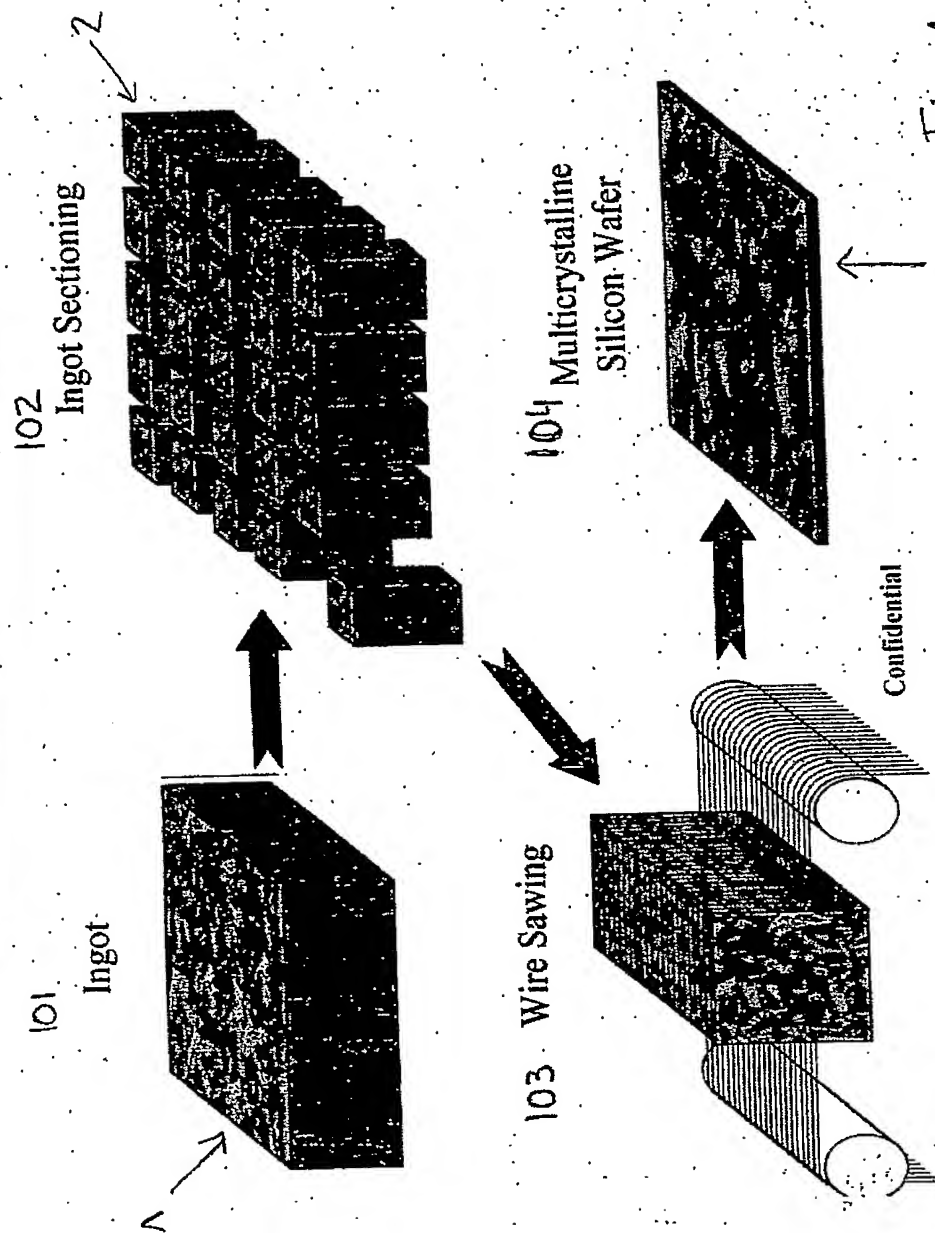


Fig. 1

2004-02-20



Flow diagram cell manufacturing

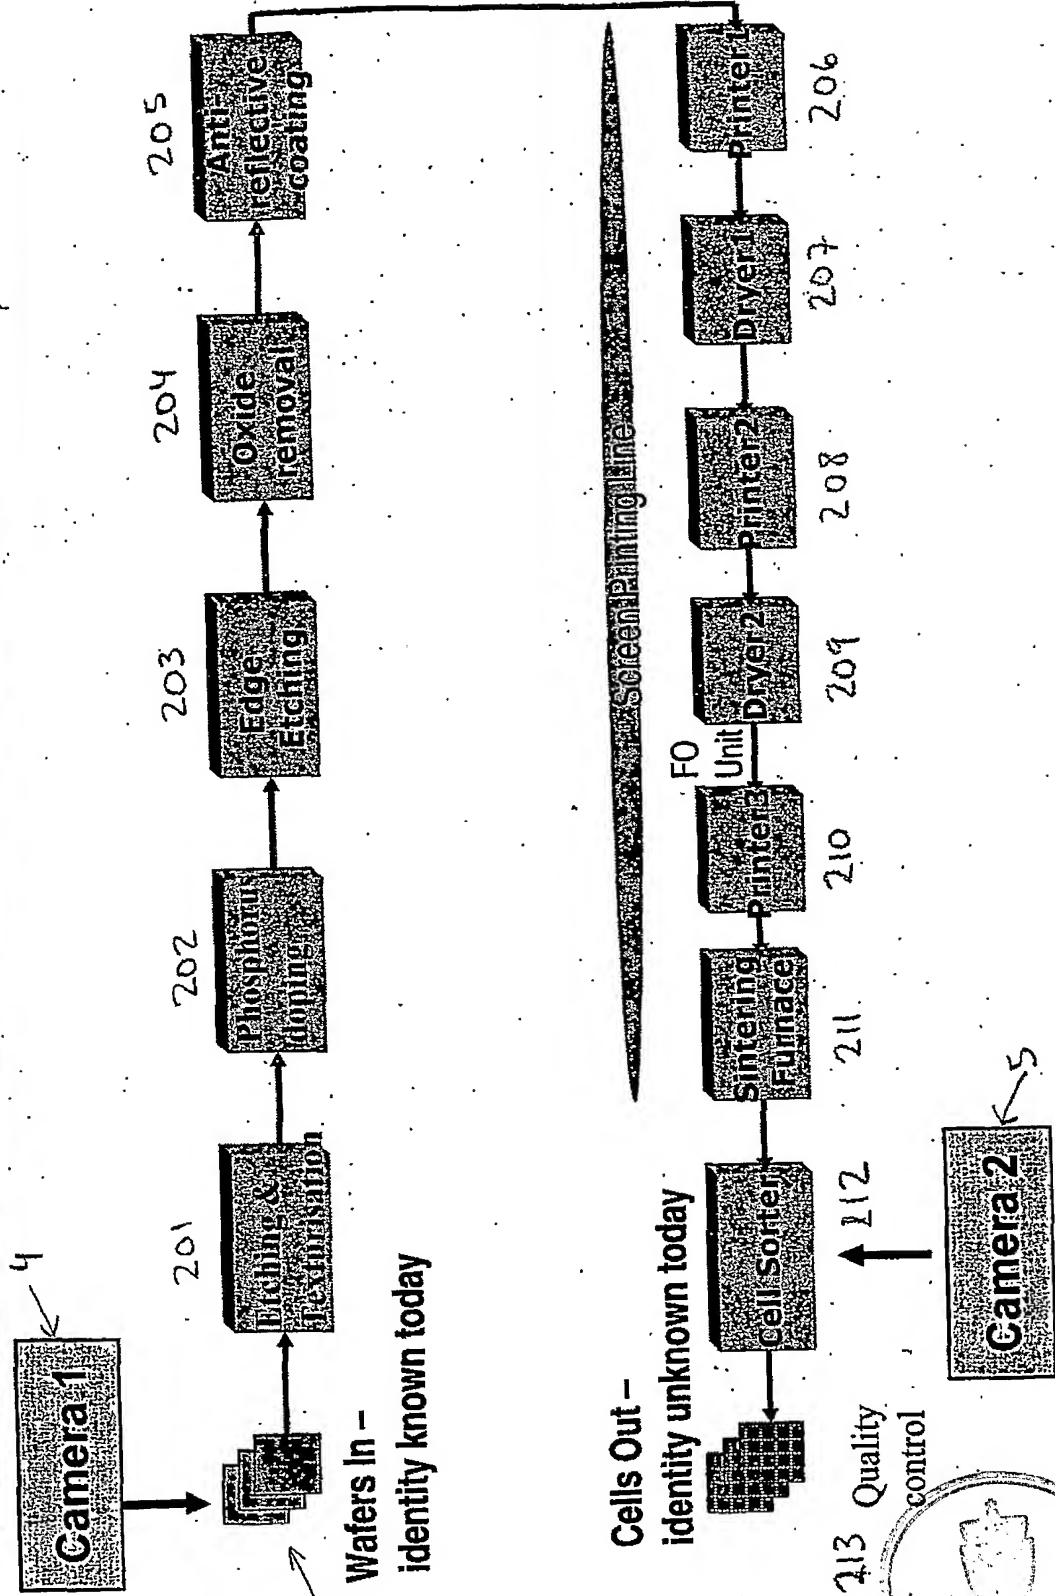



Fig.2



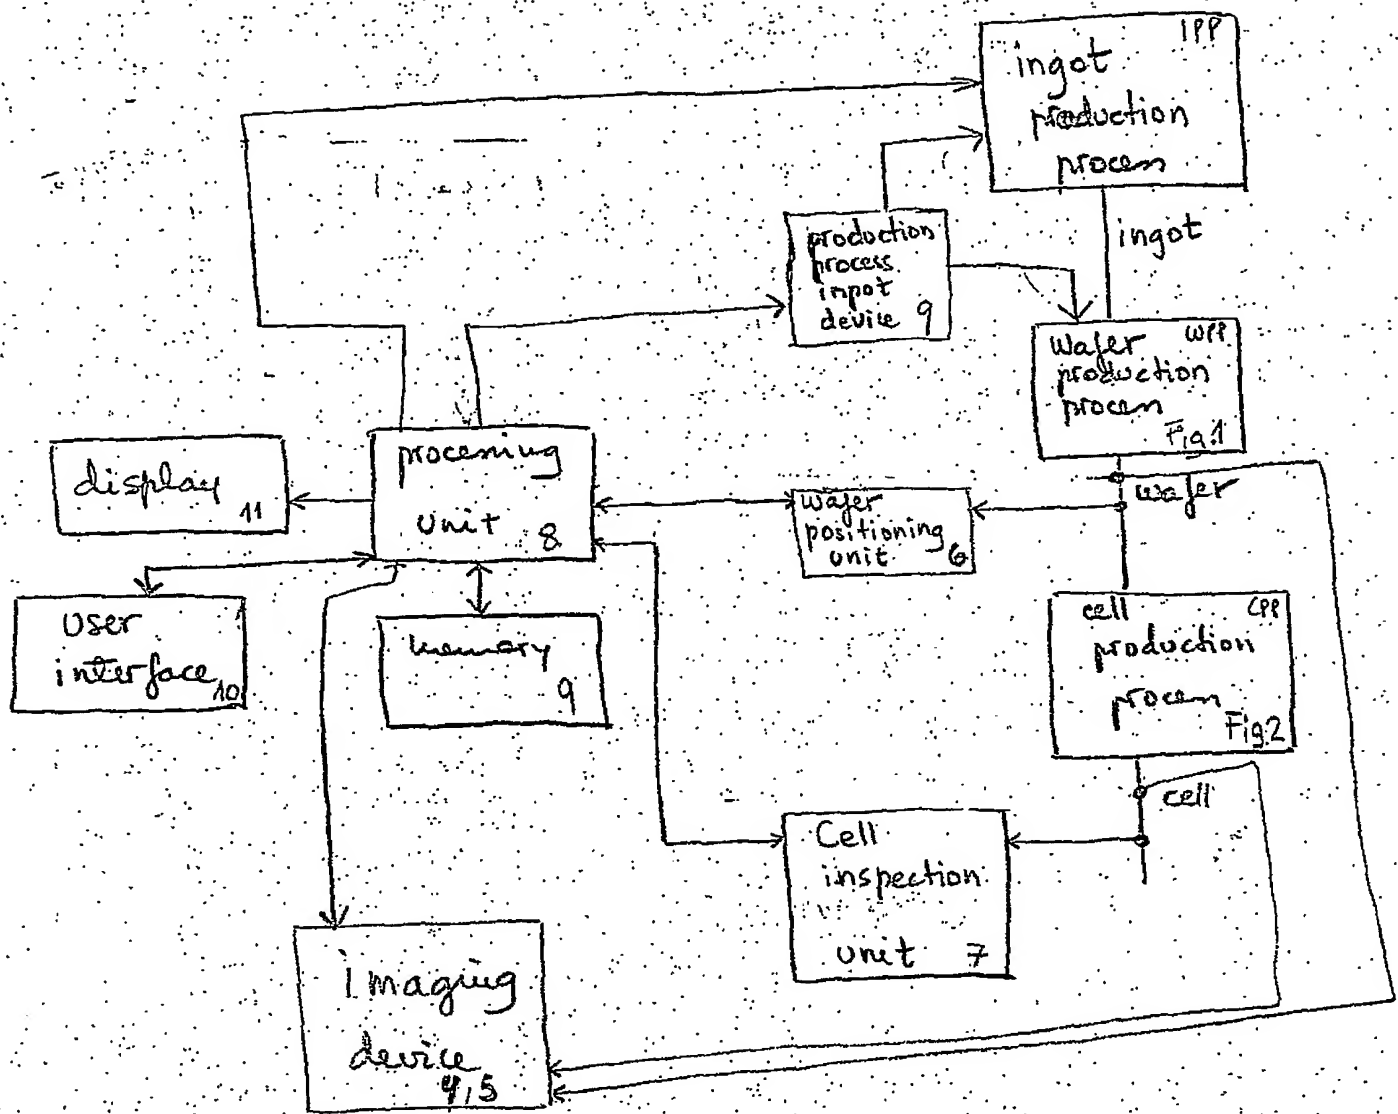


Fig. 3

